

# E6 1/4" Plastic Bolted Pumps Specifications and Performance

## SPECIFICATIONS


E6

**FLOW RATE** (Adjustable) ..... 0-4 gpm (151 lpm)  
**PORT SIZE** Inlet and Outlet  
 I.D. .... 0.25" NPTF I.D.  
 O.D. .... 0.50" NPTM O.D.  
**AIR INLET** ..... 0.25" NPTF  
**AIR EXHAUST** ..... 0.75" NPTF  
**SUCTION LIFT** ..... 5.83' Dry/25.5' Wet  
 (1.78m/777m)  
**MAX. PARTICLE SIZE** (Dia.) ..... 0.3125" (1mm)  
**SHIPPING WEIGHTS**  
 Acetal ..... 5.00 lbs (2.27 kg)  
 Polypropylene ..... 3.38 lbs (1.53 kg)  
 PVDF ..... 4.13 lbs (1.87 kg)



## PERFORMANCE Determined by actual flow meter tests.

E6

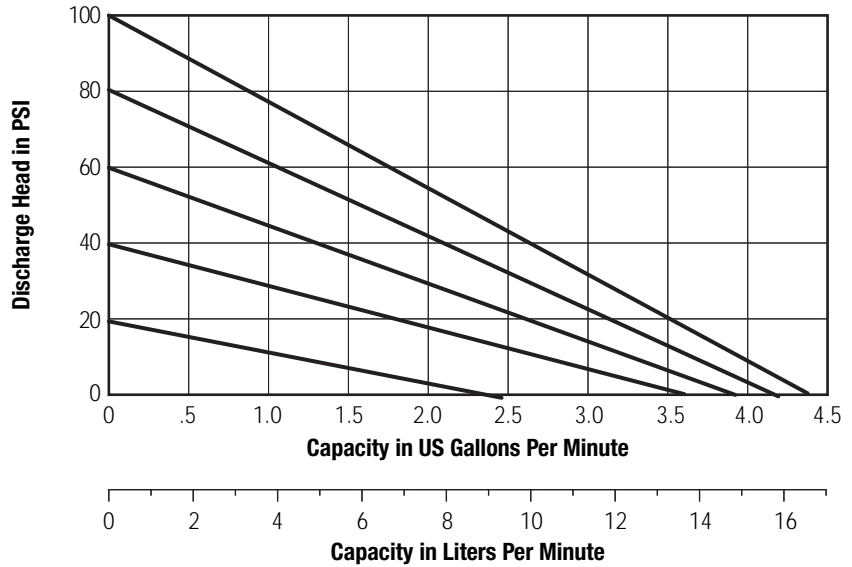

**CAUTION:** Do not exceed 125 psig (8.5 bars) air supply or liquid pressure.

## DIMENSIONS Consult factory for certified drawings.

E6

